Item # _____

C.S.I. Section 11420

VCM SERIES

HEAVY DUTY GAS INFRARED CHEESEMELTER

☐ **VCM-48R** 48" wide, 36,000 BTU/hr.

☐ **VCM-60R** 60" wide, 42,000 BTU/hr.

STANDARD FEATURES

- Stainless steel reinforced back riser for mounting over a V Series range unit.
- Stainless steel front and sides. Aluminized top.
- Equipped with heavy duty pre-mix atmospheric infrared burners, 6,000 BTU/hr. input per burner.
- Infinite heat control valves.
- Pilot ignition system.
- Heavy duty chrome plated grid rack and 3 position rack guide.
- Removable full width spillage pan.
- 3/4" top gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

OPTIONS

☐ Stainless steel back finishing panel.

☐ Interconnecting gas line.

☐ Second year extended limited parts and labor warranty.

SPECIFICATIONS:

Heavy duty gas infrared cheesemelter, Vulcan-Hart Model No. (VCM-48R) (VCM-60R). Stainless steel reinforced back riser for mounting over _____. Stainless steel front and sides. Top is aluminized steel. Equipped with heavy duty pre-mix atmospheric infrared burners, 6,000 BTU/hr. input per burner. Infinite heat control valves. Pilot ignition system. Heavy duty chrome plated grid rack and 3 position rack guide. Removable full width spillage pan. 3/4" top gas connection and gas pressure regulator.

Exterior dimensions: ____"w x 20 1/2"d x 19 1/16"h (cheesemelter dimensions only).

CSA design certified. NSF listed.

SPECIFY TYPE OF GAS AND FINISH WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

VCM SERIES Heavy Duty Gas Infrared Cheesemelter

A2780 ISO9001 Vulcan-Hart Co.

VULCAN-HART COMPANY, P.O. BOX 696, LOUISVILLE, KY 40201, TEL. 1-800-814-2028
502-778-2791 QUOTE & ORDER FAX: 1-800-444-0602

VCM SERIES

HEAVY DUTY GAS INFRARED CHEESEMELTER

IMPORTANT

1. A gas pressure regulator sized for this unit is included. Natural gas 6" W.C., Propane gas 10" W.C.
2. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
3. These units are manufactured for installation in accordance with ANSZ223.1a (latest edition), National Fuel Gas Code. Copies may be obtained from the American Gas Association, 1515 Wilson Blvd., Arlington, VA 22209.
4. Clearances:

	Combustible	Non-Combustible
Rear	0"	0"
Sides	6"	0"
Bottom	10"	4"

5. Cannot be mounted on GH series equipment.
6. This appliance is manufactured for commercial installation only and is not intended for home use.

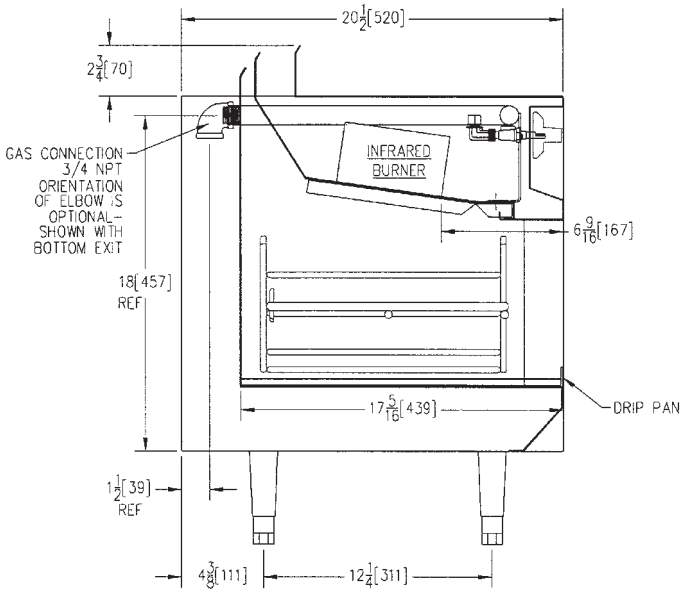

LEFT SIDE INTERNAL VIEW

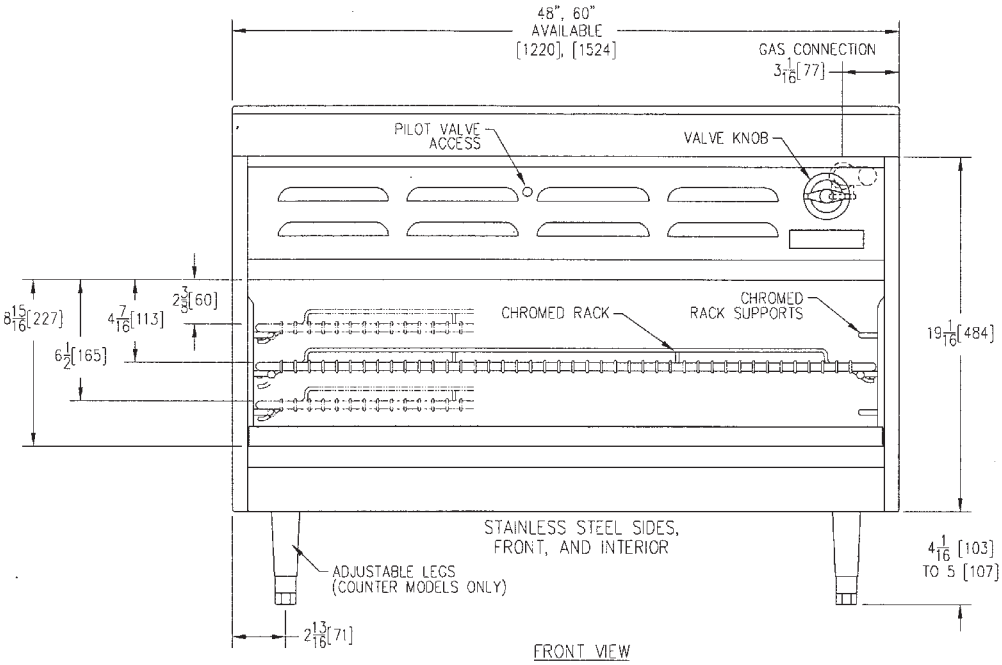

FRONT VIEW

(36" [915mm]MODEL SHOWN)

MODEL NO.	BTU/HR.	WIDTH	DEPTH	HEIGHT	APPROX. SHP. WT. (lbs./kg)
VCM-48R	36,000	48"	20½"	19 1/16"	212/95
VCM-60R	42,000	60"			265/119

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

VULCAN-HART COMPANY, P.O. BOX 696, LOUISVILLE, KY 40201, TEL. 1-800-814-2028
502-778-2791 QUOTE & ORDER FAX: 1-800-444-0602

Printed On Recycled Paper